



SG4HSZ

Human dimension of technology



www.newlast.com

SG4 HSZ consente la tornitura di due paia di zeppe o altri elementi in legno, come appendiabiti ecc. Partendo da un blocchetto di legno grezzo, sgrossa e finisce in un unico ciclo di lavoro, riducendo i tempi di produzione e garantendo precisione nel risultato.

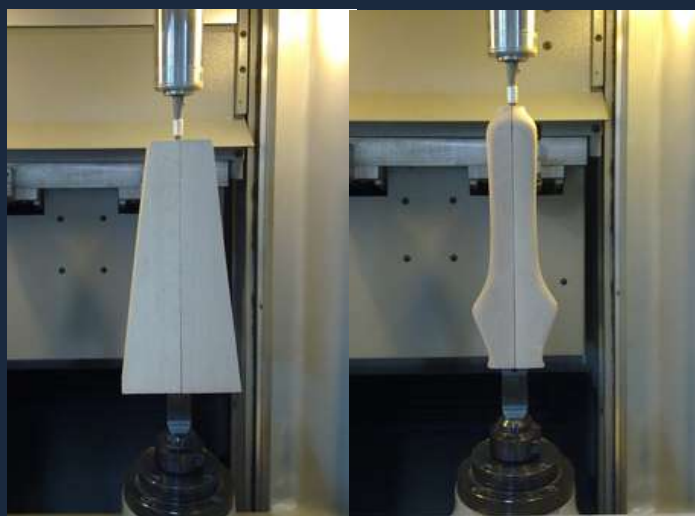



DATI TECNICI/TECHNICAL DATA

Tempo ciclo sgrossatura/ 7 min
Roughing cycle time

Ø max tornibile 300 mm
Max turnable Ø

Lunghezza massima 450 mm
lavorabile/ Maximum
working length

Velocità di rotazione/ 10÷120 rev
Rotation speed min-rev max

Teste di sgrossatura 160x36 mm
(standard)/ Roughing
Tool Heads(standard)

Potenza installata/ 28 Kw
installed power

Pressione aria/ 6 bar
Air pressure

Peso/ Weight 5000 Kg

Dimensioni/ 2850x1900
Dimensions x2500h mm

SG4 HSZ allows the turning of two pairs of wedges or other wooden elements, such as hangers etc. Starting from a block of wood, SG4 HSZ roughs and finishes in a single work cycle, reducing production times and guaranteeing precision of the result.



Newlast Group
Newlast Italia srl · italy@newlast.com
Via G. Pernigotti 31/A · 15057 Tortona (AL)
Tel +39 0131894991 · fax +39 0131814530

